




SKYLIGHT REPLACEMENT MEASUREMENT GUIDE

Contractor / job: _____ Date: _____ Unit #: _____

Brand / model: _____ Roof pitch: _____ Roof: ☐ Shingle ☐ Metal ☐ Tile


SELF-FLASHING SKYLIGHT

Attaches directly to the roof deck (no curb)

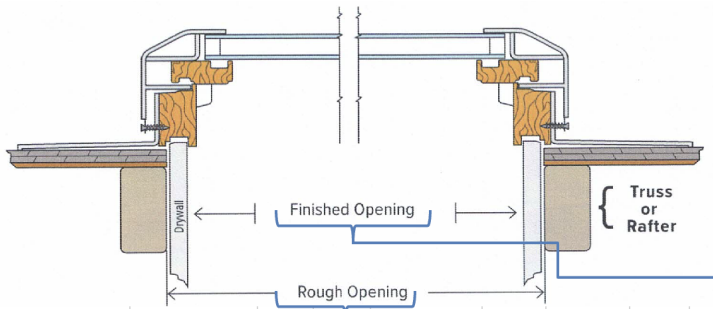

1 IDENTIFY THE EXISTING SKYLIGHT

- Continuous flashing; normally a shallow profile.
- No separate site-built curb.
- Measure the base, not the frame.

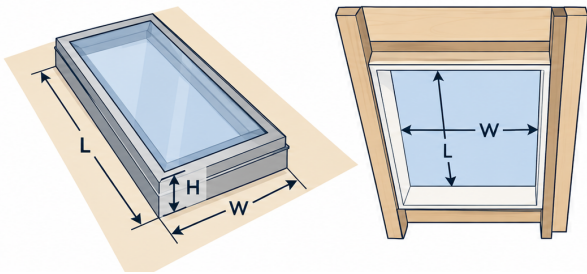

2 MEASURE THE ROUGH OPENING

If you cannot access the rough opening; measure the base, not the frame.

Width (W): _____ Length (L): _____

3 MEASURE THE OPENINGS


Rough opening W: _____ L: _____

Finished drywall W: _____ L: _____

Interior finish: Standard is white wood.
Natural wood can be ordered.


CURB-MOUNTED SKYLIGHT

Attaches to a separate, site-built curb

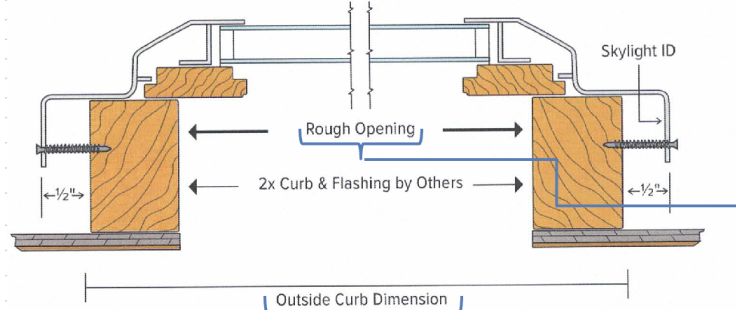

1 IDENTIFY THE EXISTING SKYLIGHT

- Sits on a separate raised curb.
- Flashing wraps the site-built curb.
- Measure outside curb dimensions, including flashing.

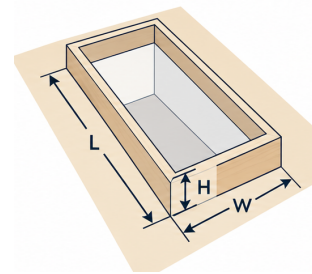

2 MEASURE THE OUTSIDE CURB

Include flashing in outside curb measurements.

Width (W): _____ Length (L): _____

Please note: On our units, the outside curb dimension is 3" larger than the rough opening.

3 MEASURE THE OPENINGS

Rough opening W: _____ L: _____

Finished drywall W: _____ L: _____

Interior finish: Standard is white wood.
Natural wood can be ordered.

REPLACEMENT SKYLIGHT / FIELD NOTES

☐ Photos attached

Additional notes: _____

