




# Tempered Glass Skylights







### Certifications

- Certified to meet performance criteria as defined by AAMA/CSA/WDMA 101/I.S. 2/A440
- Florida Building Code Approved
- Class V2 Fire Rated
- NAMI Participant (Quality Assurance Program)







Kennedy Skylights manufactures high performing, quality glass skylights in both curb or deck mount models to accommodate all roof pitches and roofing systems. Our energy efficient **Tempered Glass Series** is a great choice for warmer climates or locations that do not experience severe weather. For hurricane prone areas, upgrade to our **Impact Glass Series**.

### **TEMPERED GLASS FEATURES:**

- Dual pane, argon filled glass with LoE-240 coating
- Undergoes a specialized heating process that creates a strong, resilient glass that, if it should crack, will fracture into very small pieces versus larger glass shards
- Meets performance standards for air infiltration, design pressure, water penetration and load testing
- High performance ratings for light transmission, solar heat gain, U-factor, and fading transmission
- Advanced technology dual-seal silicone system with patented stainless steel spacers

### **KEY DESIGN FEATURES:**

- .062 extruded heavy-duty aluminum frame
- Welded corners for added strength and leak-proof barrier
- Powder coated bronze exterior for additional durability
- Easy-release, continuous hinge secures skylight frame to curb for quick removal and designed to divert water away from skylight
- Full perimeter condensation gutter prevents water infiltration

### **WARRANTY:**

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials






# **Tempered Glass Skylights**

## **TSFG** Self-Flashing Fixed Glass

2" | 4" | 6" | Curbs



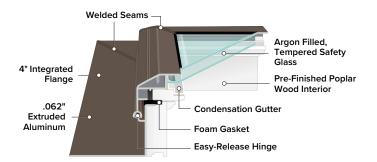

- LoE-240, argon filled tempered glass
- Meets the stringent requirements of the Florida Building Code (FL15592.5)
- Choice of 2", 4" or 6" high curb
- Drywall return sized for both 1/2" and 5/8" drywall
- .062" extruded aluminum with welded corners
- Integrated 4" flange with pre-drilled screw holes
- Powder coated bronze exterior
- Pre-finished poplar wood interior
- 25-Year non-prorated limited warranty on insulated glass against seal failure


### **TSFG MODEL SIZES**

Size	1430	1446	2222	2230	2246	4622	2269	3030	3046	4646
Rough Opening					22.5"x 46.5"					46.5"x 46.5"

### TCMG Curb Mount Glass


No Curb Included



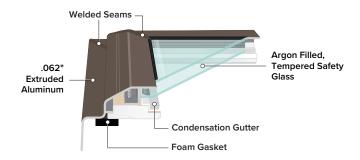

- LoE-240, argon filled tempered glass
- Meets the stringent requirements of the Florida Building Code (FL15592.4)
- Available in standard sizes to easily replace old skylights from other manufacturers including Velux
- .062" extruded aluminum with welded corners
- Oversized to fit most curbs
- Kennedy aluminum curbs available AC or ACW
- Powder coated bronze exterior
- 25-Year non-prorated limited warranty on insulated glass against seal failure

### **TCMG MODEL SIZES**



<sup>†</sup>TCMG models are manufactured 1" larger than outside curb dimension to allow for flashing material.

